

ELTECH SAS - 18 rue des Malines - 91090 LISSES France

Tél :(33) 01.69.11.15.70



TECHNICAL DATA SHEET LUBRICANT ALUMINIUM ENTRY BOARDS

COMPOSITION

- LUBRICANT ALU ENTRY BOARDS are consisting special aluminium alloy with soluble lubricant coating for special drilling applications.

APPLICATION


- ALU entry boards is used as an entry board for printed circuits.

PROPERTIES

1. Effective buffering
2. Avoid pressure foot
3. Proper smoothness and lubricity
4. Enhance drill positioning precision
5. Increase drill life
6. Minimize drill damage
7. Improve aperture quality
8. Suitable for drilling up to 0,15 mm

AVALIABILITY

TYPE	THICKNESS in mm
ELTLUB 12	0,12
ELTLUB 14	0,14
ELTLUB 15	0,15
ELTLUB 18	0,18
ELTLUB 21	0,21
ELTLUB 24	0,24

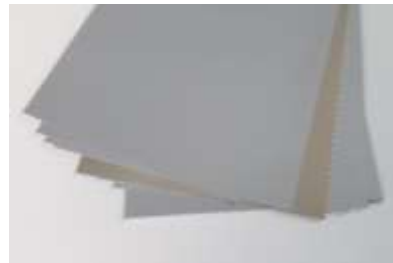

Lubricant aluminium

ELTLUB 18 is curently available. Other thickness under request.

OTHER

Recycling: Our Water soluble lubricant aluminium, could be recycled as normal aluminium waste.

Storage conditions: Below temperature 30°C, below humidity 60%.